


Humula Road - Umbango Bridge Maintenance Works

NOTES:

- TGS issue 2 of 2, Implement lane closure using Giveaway Sign
- When workers on site implement Portable Traffic Signal Plan (PTS) TGS No. 7420
- See notes page attached to TGS No. 7420
- 40km/hr signage required when workers on site ①
- Giveaway and No Overtaking (R1-2 & R6-1) signs replace Portable Traffic Signal(PTS) ②
- Prepare to Stop & Traffic Signal sign(T1-18 & W3-3) erect with PTS ③
- Workman (T1-5) erect when workers on site ④

Legend	
	Area Closed
	Guardrail
	R1-2 Give Way
	R4-1 (100)
	R4-212 (60)
	R4-212 (80)
	R6-1
	R9-9
	T1-2
	T1-23
	T1-25
	T1-29
	Tubular

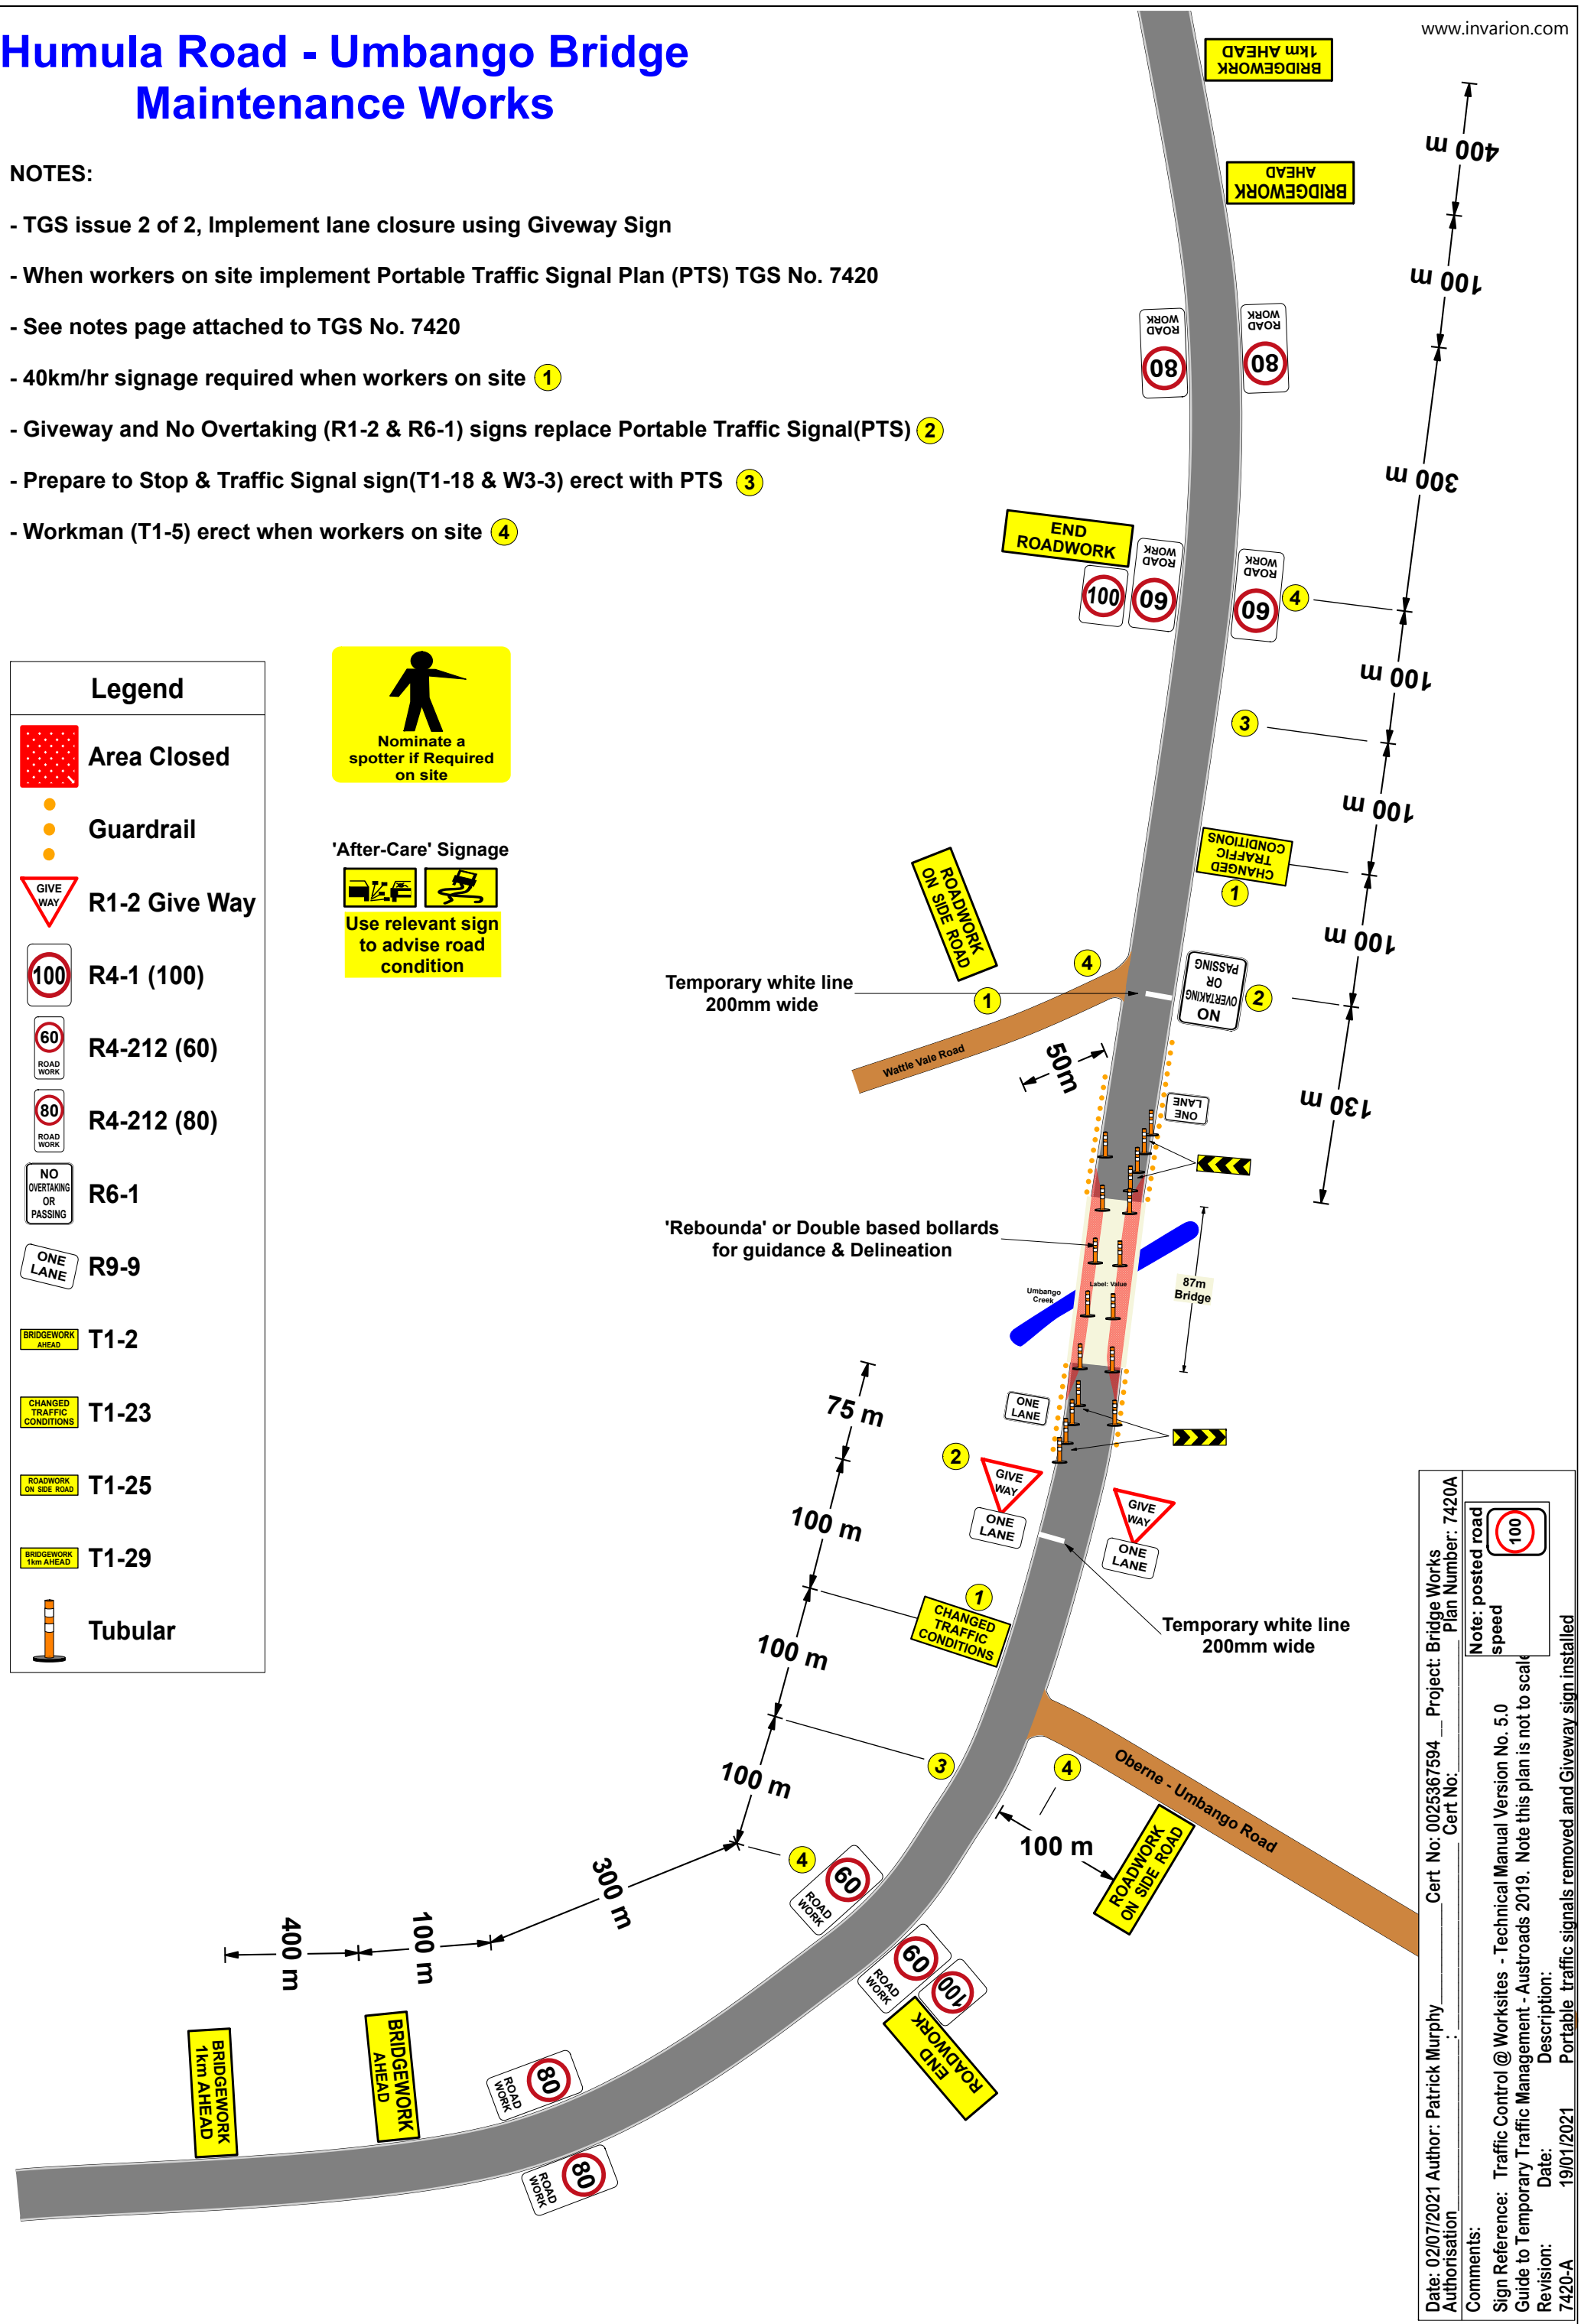

Date: 02/07/2021	Author: Patrick Murphy	Cert No: 0025367594	Project: Bridge Works	Plan Number: 7420A
Authorisation		Cert No:		
Comments:	Note: posted road speed			
Sign Reference:	Traffic Control @ Worksites - Technical Manual Version No. 5.0			
Guide to Temporary Traffic Management - Austroads 2019.	Note this plan is not to scale			
Revision:	Date:	19/01/2021	Description:	Portable traffic signals removed and Giveaway sign installed
7420-A				